

DYNAPRO TIPMATIC SOFT-CLOSE

Full extension slide 40/70 kg



- Mechanical opening system for handle-free fronts
- Combines Tipmatic function with Soft-close damping
- Tool-free assembly of the Tipmatic Soft-close unit
- Can be used for Dynapro Soft-close full extension slides
- One unit for all nominal lengths and weight classes
- 3-stage adjustment of the opening force
- Wide trigger range due to synchronisation rod

Packaging unit (PU):

204 = 5 units in a cardboard box
 207 = 10 units in a cardboard box
 208 = 12 units in a cardboard box
 210 = 15 units in a cardboard box
 211 = 20 units in a cardboard box
 213 = 25 units in a cardboard box
 223 = 100 units in a cardboard box
 233 = 200 units in a cardboard box
 517 = 50 units in PE in a cardboard box
 607 = 10 units in a cardboard box in a cardboard box

Note:

- Dynapro Tipmatic Soft-close can be used from nominal length (NL) 270

ORDER INFORMATION

1 Dynapro full extension slide Soft-close Set: One left, one right					
NL	40 kg		70 kg		
	Art.-no.	PU	Art.-no.	PU	
270	F130107793	204 211	-		
300	F130107796	204 211	-		
320	F130107799	204 211	-		
350	F130107802	204 211	-		
380	F130107805	204 211	-		
400	F130107808	204 211	-		
420	F130107811	204 211	-		
450	F130107814	204 210	F130107832	204	210
480	F130107817	204 210	-		
500	F130107820	204 210	F130107838	204	210
520	F130107823	204 210	F130107841	204	210
550	F130107826	204 210	F130107844	204	210
580	-		F130107847	204	208
600	F130107829	204 208	F130107850	204	208
650	-		F130107853	204	208
700*	-		F130107856	204	208
750*	-		F130107859	204	208

* Load capacity 50 kg


4 Synchronisation rod Single item: For cutting to length					
L	Art.-no.	PU			
952	F134109410	207			

Individual components		
Description	Art.-no.	PU
Dynapro Tipmatic Soft-close unit Set: One left, one right	F134109324	213
Dynapro Tipmatic Soft-close activator Set: One left, one right	F134109325	223
Front locking device (1D) Set: One left, one right	F134101220	233 517
Front locking device (2D) Set: One left, one right	F134108949	233
Adjustment adapter (1D) Set: One left, one right	F134108952	233

2a Dynapro 3D-Set Front locking device (2D) and adjustment adapter (1D), one of each left/right					
	Art.-no.	PU			
	F134108956	517			

2b Dynapro 2D set Front locking device (1D) and adjustment adapter (1D), one of each left/right					
	Art.-no.	PU			
	F134117193	517			

3 Dynapro Tipmatic Soft-close Set: Unit and activator, one of each left/right					
	Art.-no.	PU			
	F134109323	607			



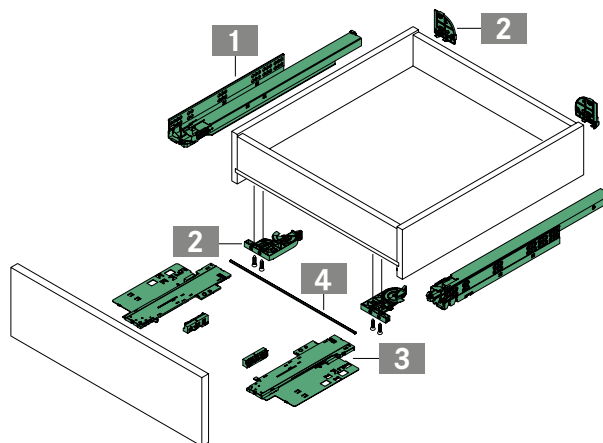


PAGE REFERENCES

Pull-out shelf	18	Assembly aids	24		
Technical information	20	Packaging code	75		

PLANNING DIMENSIONS

All dimensions in millimetres

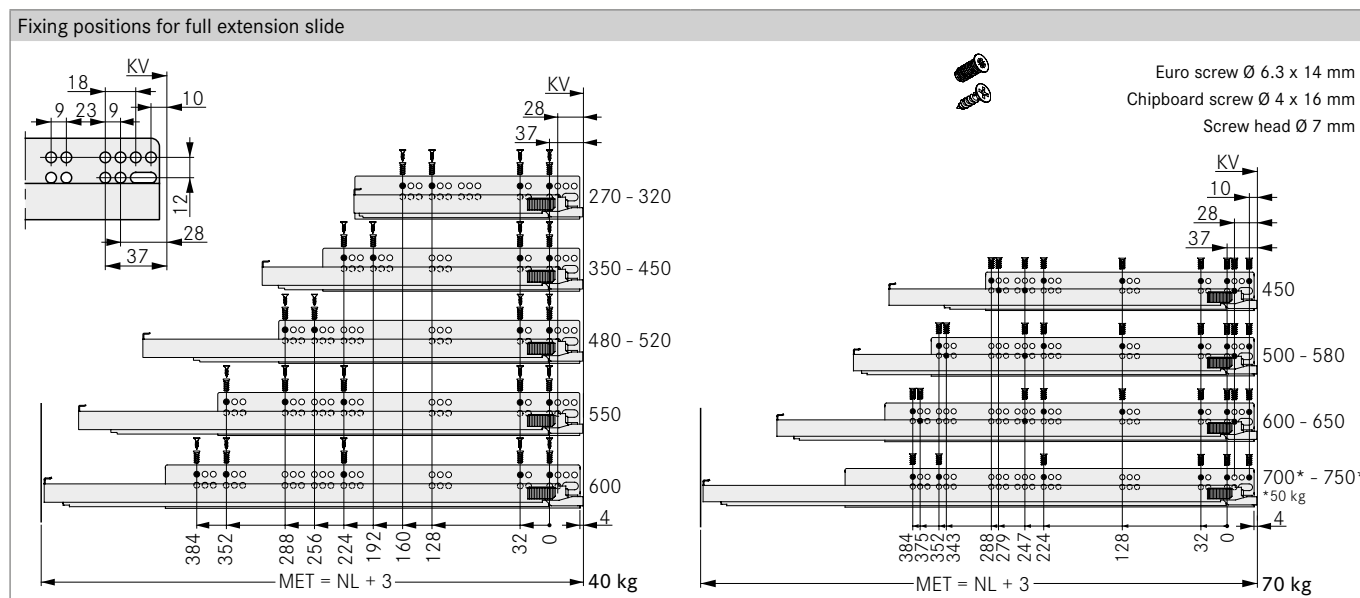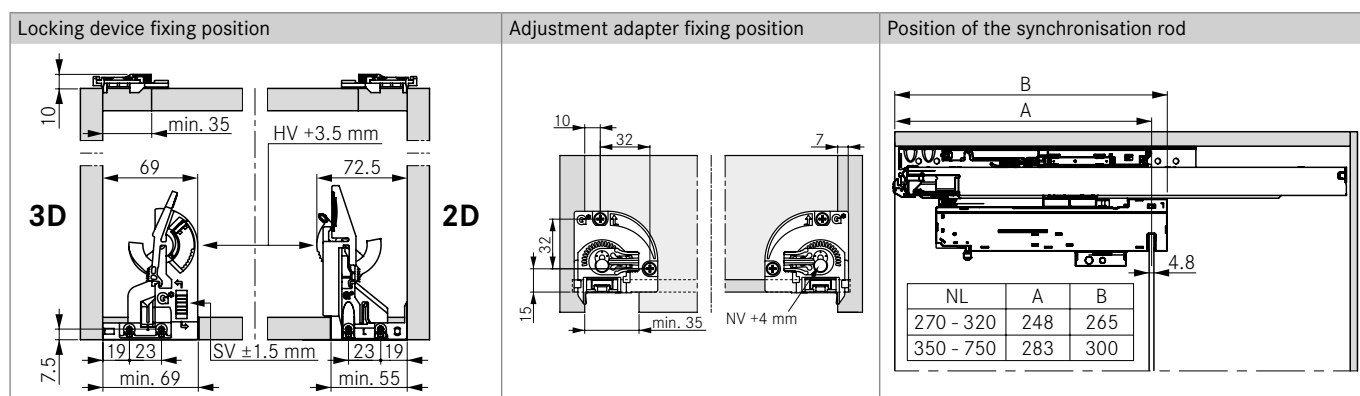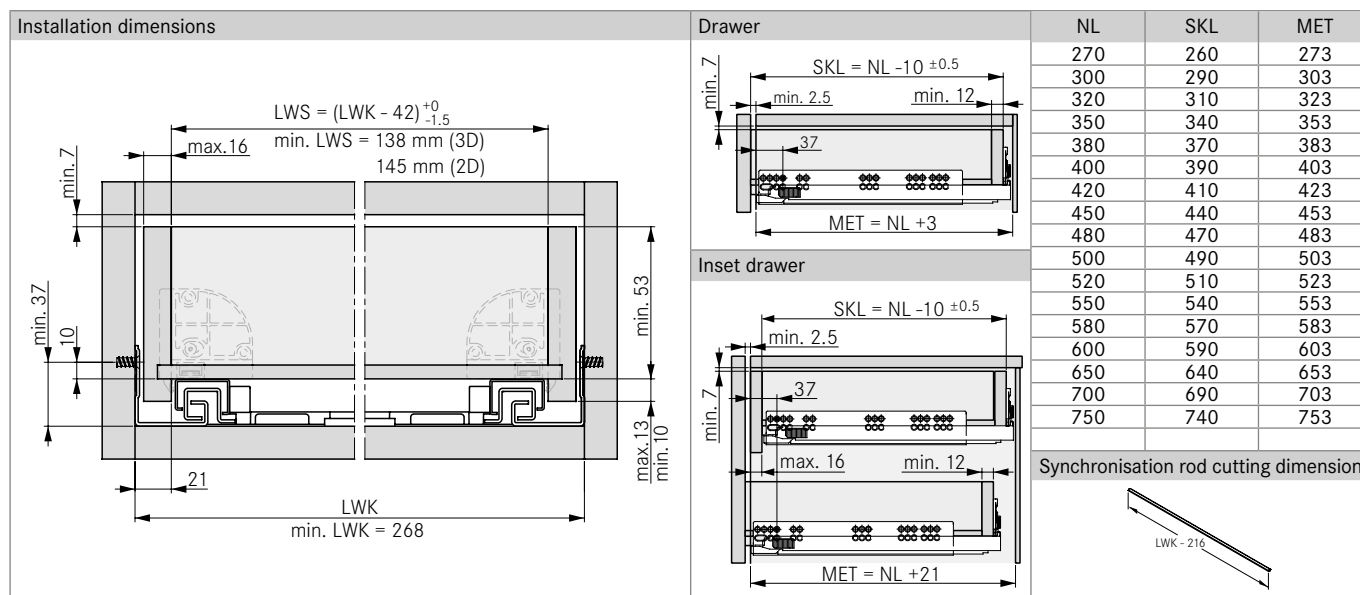

LEGEND

HV	Height adjustment	LWS	Internal drawer width	SKL	Length of drawer
KV	Front edge of cabinet	MET	Minimum installation depth	SV	Side adjustment
L	Length	NL	Nominal length		
LWK	Inside cabinet width	NV	Tilt angle adjustment		